


'SMALL' CANOE & KAYAK TRAILERS

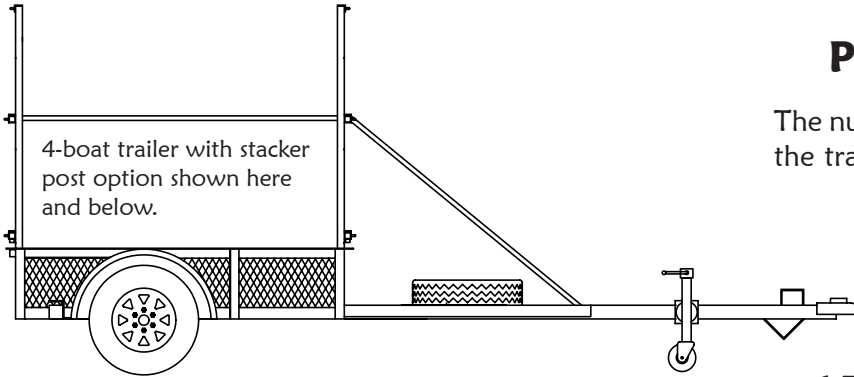

4-boat trailer with stacker post option shown here and below.

STANDARD FEATURES:

- Heavy duty steel frame and expanded steel (puddle free) cargo box. The 4 boat trailer weighs approximately 450 lbs.; This facilitates towing with smaller vehicles.
- Independent, rubber torsion suspension provides a smooth, quiet ride and lower frame height.
- Easily lubed hubs -- lubricate all bearings without disassembly.
- Axle positioned for a stable ride and to prevent flipping when not attached to a vehicle (even when climbing on back end).
- 13" tires and galvanized wheels. Spare tire and wheel are standard. Sturdy metal fenders with closed backs.
- 2" ball coupler.
- Flip-up 6" jack wheel.
- Rung protection stripping made from durable, non-marring rubber. Protective end caps and two tie-down points on each rung.
- LED tail/side marker lights that are mounted high and protected by steel channel. LED front marker lights. Lighted license plate holder. 4-wire-flat plug.
- Color: Gloss black.
- Designed by a company that uses them daily: us.
- Registered with National Highway Traffic Safety Administration.

PRICES:

2-boat	4-boat
\$3100	\$3200

The number of boats indicates the canoe capacity of the trailer (the number of rung spaces); the kayak capacity is normally double this number.


OPTION PRICES:

- 1 7/8" ball coupler no charge
- Bungee cords \$3/each
- 20" stacker posts; without this the top rung spans the full trailer width, uninterrupted. . \$100
- White wheels no charge
- Increase box length and tree spread to 8 foot \$300
- Custom trailer configurations as quoted.

'Standard' Canoe Trailers are available with 4, 6, 8, or 10 canoe capacity - bigger & heavier. "Standard" Kayak Trailers are also available.

DIMENSIONS AND RATINGS:

- Width of lower rungs and rung with stacker 36"
- Vertical clearance between rungs 24"
- Overall length 15'- 7"
- Overall width (width of top rung) 6'- 6"
- Overall height 2-boat 2'- 6", 4-boat 4'- 7½"
- G.V.W.R. 2000 lbs.
- Optimum top of ball height. 16 to 17"

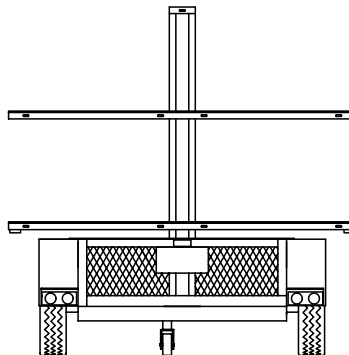

CARGO BOX:

- Width 4'- 0"
- Length 6'- 0" (distance between trees)
- Depth 15"
- Floor to Rung 19" (cooler compatible)
- Volume 30 cubic feet